

© 2025 Eco Structures

ECO STRUCTURES

WANT TO KNOW MORE?

ecostructures.com.au



@EcoStructuresAustralia

Link Tents

USD PRICING | **AUGUST 2025**





Link Tents

Engineered with a smart linking system, our Modular Link Tents seamlessly connect bedrooms, lounge areas, and facility buildings. This flexibility allows operators to expand or adapt layouts over time, scaling accommodation offerings to meet demand.

ADAPTIVE DESIGN

Layouts can be reconfigured or expanded at any time, offering operators the freedom to scale up, diversify accommodation, or tailor guest experiences without starting from scratch.

DESIGNED FOR EXPERIENCE

Nature-inspired finishes and spacious interiors balance privacy with shared spaces, enhancing guest comfort and wellbeing.


SMART INVESTMENT

Designed to adapt to your vision and future needs. They meet the growing demand for experiential, eco-conscious travel while ensuring long-term commercial flexibility.

SUSTAINABLE & SMART

Flatpack delivery, Eco Anchors, and recyclable steel reduce impact, while modular upgrades mean minimal waste.

Link Tents

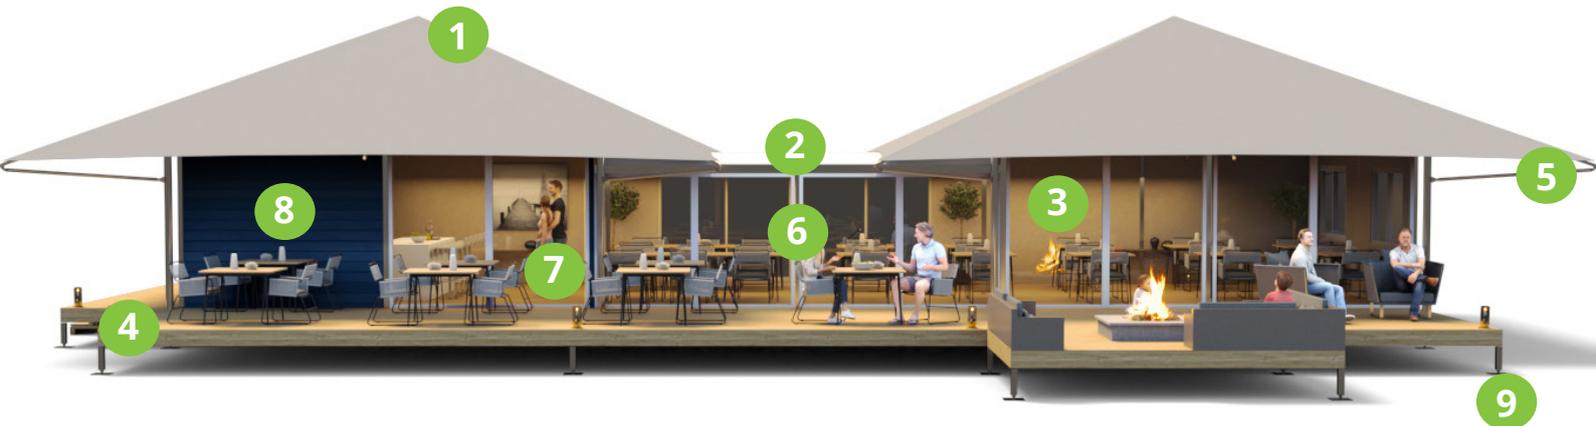

- 1** PVC Roof Fly available in Pale Beige, Nato Olive and White
- 2** Link Roof Colorbond Tin
- 3** RT12 Canvas Walls and Ceilings
- 4** Wood Composite Decking
- 5** Steel structural frame Hot dipped galvanised
- 6** Optional Sliding Glass Front Doors
- 7** Optional Vinyl Floor
- 8** Optional Insulated Hybrid Wall Panels
- 9** Optional Patented Eco Anchors -Concrete Free Foundation
- 10** Optional Lift & Brace Kits for sloping and undulating ground.



Eco Structures is a modularised tent system which is easily adapted to suit the climate, market or site. Our goal is to work with clients and architects to develop a framework of their preferred solutions.

Central to our operational success is our modular design philosophy, which fosters flexibility, speed, and scalability in project execution. By standardising foundational elements and components, we streamline engineering and construction processes, thereby reducing project timelines. This approach not only enhances efficiency but also expands our capability to reach remote locations previously constrained by traditional construction methods.



Flexibility

At Eco Structures Australia, our innovative link tent system redefines modular design. Each link connects seamlessly, giving you the freedom to create anything from a multi-room sanctuary to a functional facility building.

Every module is a building block of possibility, with upgrades from luxury finishes to practical features. You shape the layout, we make it easy. Our team works with you to design a space that's uniquely yours, simple to plan, and exciting to bring to life.

UPGRADE TO A HYBRID TENT

Choose the perfect outdoor experience. Go for the open-air feel of an Eco Tent, or choose the Hybrid for superior insulation, energy efficiency, and all-season comfort.

Same modular link tent system, far higher performance.

DECKING- EXPAND YOUR HORIZONS

Choose the perfect outdoor experience for your guests with decks that extend the usable space and blur the line between indoors and out.

Standard: 1.8m for a cosy touch
Extended: 2.7m for a spacious feel
Grand: 5.4m for ultimate outdoor living

INTERNAL WALLS

Partition your space exactly as you imagine. Add canvas walls for flexible zones or opt for solid internal walls when you choose our panelised hard wall system. Bedrooms, lounges, living spaces- your floor plan evolves with your vision.

EXTERNAL FINISH OPTIONS

Your structure's look can be as natural or as modern as you desire. Start with our classic canvas or step up to a panelised hard wall system, stylish glass features, or sleek Colourbond finishes.

You choose the aesthetic- we'll make it happen

BATHPODS

Our integrated bathpods bring stylish, functional bathroom solutions into any layout—perfectly matched to your tent's design and location.

GLASS WINDOWS & DOORS

Bring the outside in with sliding glass doors or create panoramic views with large windows. Perfect for light-filled days and seamless indoor/outdoor living.



Link Eco Tent 4.2m

*13.7ft

Eco Tent


Eco Tent Price Includes	Price USD
x2 Standard Eco Tent's 4.2m x 4.2m Option 01 *13.7ft x 13.7ft <ul style="list-style-type: none"> RT12 Canvas Walls and Ceilings PVC Roof Floor joist and bearers galvanised 200C Steel structural frame – Hot dipped galvanised steel CFC Floor Sheeting 1.8m x 4.2m Composite Decking *5.9ft x 13.7ft All fixing required for install 	\$36,526
Standard Module Link 4.2m x 6.1m *13.7ft x 20ft <ul style="list-style-type: none"> x2 Canvas Walls Gyprock Ceiling Colorbond Tin Roof Floor joist and bearers galvanised 200C Steel structural frame – Hot dipped galvanised steel CFC Floor Sheeting All fixing required for install 	\$12,012
Composite Deck Front of Link 1.8m x 6.1m *5.9ft x 20ft	\$3,074
Total	\$51,612

Value Adds	Price USD
Eco Anchors *Base Requires 15	\$115 each
Vinyl Floor *Varies per m2	\$2,220
Sliding Glass Front Doors	\$3,490 each
Add-on Enclosure	\$4,812 each
Bath Pod *Includes Steel Slide & Canvas Wrap	\$16,579 each
Bath Kit *Must add on an enclosure	\$2,900
K1 Kitchen *Appliances and Splashback Not Included	\$1,990
2 Tread Stairs	\$499
Balustrade *Varies per m2	\$6,770

*Please note - All prices are in USD 1AUD=0.66USD and exclude Sales Tax, installation, plumbing, electrical works and civil works. No allowance for concrete footings have been made if rock is present. Internal floor layouts shown for illustrative purposes only- All furniture is by client. Subject to engineering and design specification changes.

As Shown- No Sliding Doors

Internal- 61m2
*200sqft
Decking- 26m2
*85.3sqft

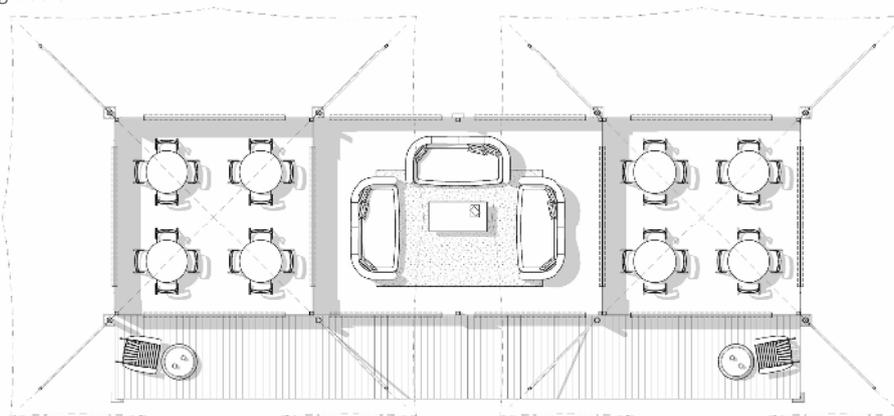



Link Eco Tent 5m


*16.4ft

Eco Tent

Eco Tent Price Includes	Price USD
x2 Standard Eco Tent's 5m x 5m Option 01 *16.4ft x 16.4ft <ul style="list-style-type: none"> RT12 Canvas Walls and Ceilings PVC Roof Floor joist and bearers galvanised 200C Steel structural frame – Hot dipped galvanised steel CFC Floor Sheeting 1.8m x 5m Composite Decking *5.9ft x 16.4ft All fixing required for install 	\$51,610
Standard Module Link 5m x 6.1m *16.4ft x 20ft <ul style="list-style-type: none"> x2 Canvas Walls Gyprock Ceiling Colorbond Tin Roof Floor joist and bearers galvanised 200C Steel structural frame – Hot dipped galvanised steel CFC Floor Sheeting All fixing required for install 	\$14,850
Composite Deck Front of Link 1.8m x 6.1m *5.9ft x 20ft	\$3,074
Total	\$69,534

Value Adds	Price USD
Eco Anchors *Base Requires 28	\$115 each
Vinyl Floor *Varies per m2	\$2,880
Sliding Glass Front Doors	\$4,207 each
Add-on Enclosure	\$5,056 each
Bath Pod *Includes Steel Slide & Canvas Wrap	\$16,579 each
Bath Kit *Must add on an enclosure	\$2,900
K1 Kitchen *Appliances and Splashback Not Included	\$1,990
2 Tread Stairs	\$499
Balustrade *Varies per m2	\$7,368

**Please note - All prices are in USD 1AUD=0.66USD and exclude Sales Tax, installation, plumbing, electrical works and civil works. No allowance for concrete footings have been made if rock is present. Internal floor layouts shown for illustrative purposes only- All furniture is by client. Subject to engineering and design specification changes.*

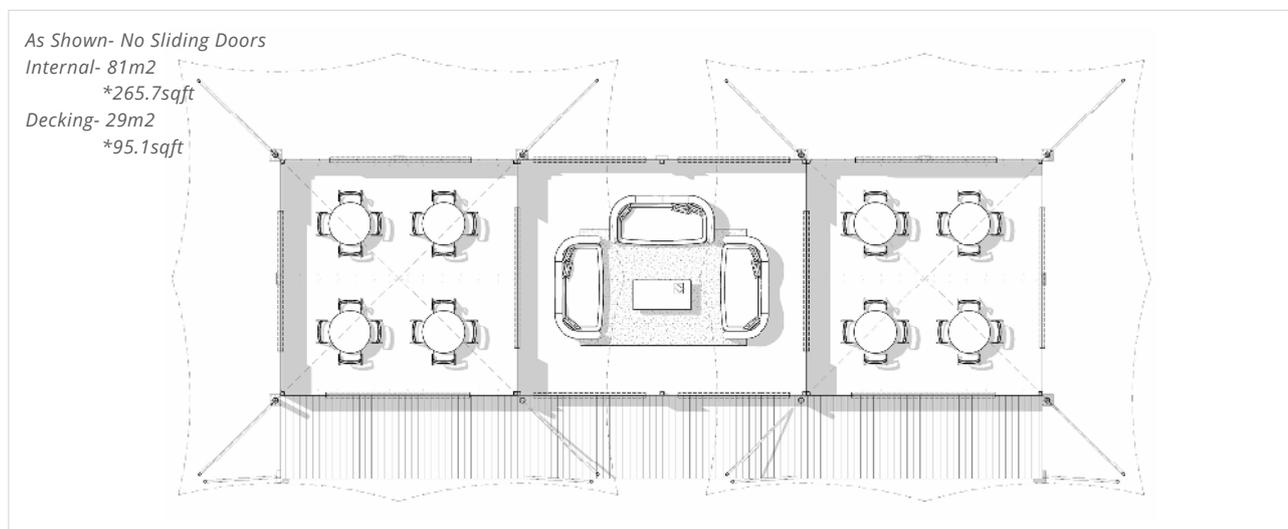



Link Eco Tent 6.3m


Eco Tent

*20.6ft

Eco Tent Price Includes	Price USD
x2 Standard Eco Tent's 6.3m x 6.3m Option 01 *20.6ft x 20.6ft <ul style="list-style-type: none"> RT12 Canvas Walls and Ceilings PVC Roof Floor joist and bearers galvanised 200C Steel structural frame – Hot dipped galvanised steel CFC Floor Sheeting 1.8m x 6.3m Composite Decking *5.9ft x 20.6ft All fixing required for install 	\$58,466
Standard Module Link 6.3m x 6.1m *20.6ft x 20ft <ul style="list-style-type: none"> x2 Canvas Walls Gyprock Ceiling Colorbond Tin Roof Floor joist and bearers galvanised 200C Steel structural frame – Hot dipped galvanised steel CFC Floor Sheeting All fixing required for install 	\$17,141
Composite Deck Front of Link 1.8m x 6.1m *5.9ft x 20ft	\$3,074
Total	\$78,681

Value Adds	Price USD
Eco Anchors *Base Requires 28	\$115 each
Vinyl Floor *Varies per m2	\$4,320
Sliding Glass Front Doors	\$5,298 each
Add-on Enclosure	\$5,504 each
Bath Pod *Includes Steel Slide & Canvas Wrap	\$16,579 each
Bath Kit *Must add on an enclosure	\$2,900
K1 Kitchen *Appliances and Splashback Not Included	\$1,990
2 Tread Stairs	\$499
Balustrade *Varies per m2	\$8,340

*Please note - All prices are in USD 1AUD=0.66USD and exclude Sales Tax, installation, plumbing, electrical works and civil works. No allowance for concrete footings have been made if rock is present. Internal floor layouts shown for illustrative purposes only- All furniture is by client. Subject to engineering and design specification changes.

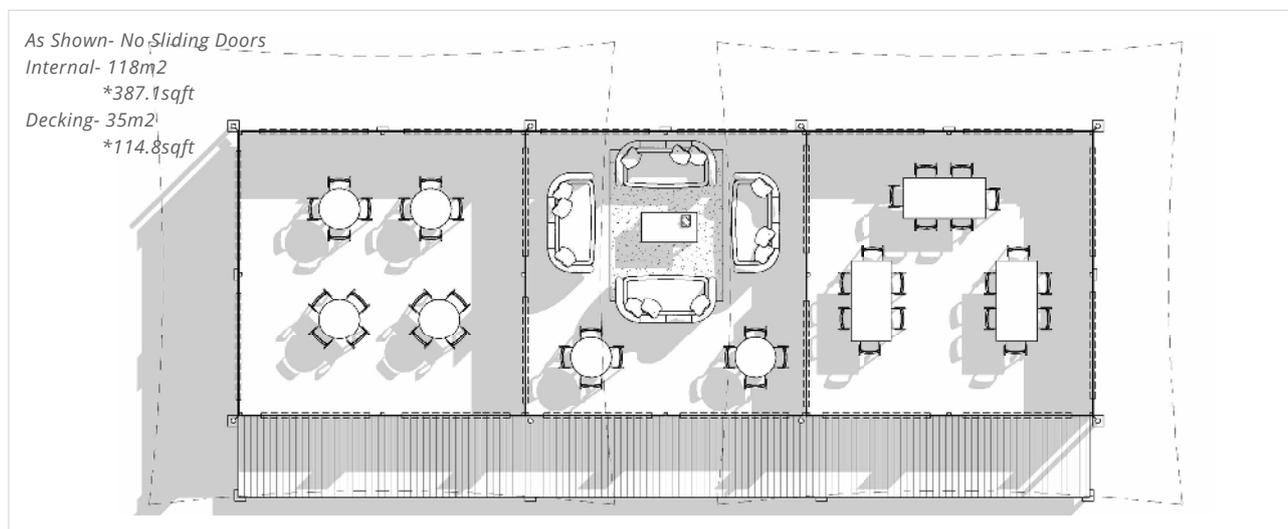



Hybrid Link Tents



The Hybrid Add On

Our Hybrid tents feature the highest performing proprietary structural insulated panel on the market.

THERMAL EFFICIENCY

Insulation rating R3.3.

STRUCTURAL INTEGRITY

Panels are fully bonded for the highest cyclone rating in the world (Cyclonic Region D).

EASE OF ASSEMBLY

Panels can be easily lifted into position by a small team. Joints are glued, with no requirements for mechanical fixings.

SAFE

- Require less maintenance
- Minimise additional insulation costs
- Fire resistance
- Hypoallergenic
- Moisture resistant

ELECTRICAL & PLUMBING

Cabling and pipework runs between the panels, alleviating the need for complex and messy chasing or the installation of conduits.



x 165 more

Thermally efficient than a single skin canvas wall



x 30 Acoustic

dB rating than a single skin canvas wall



Structurally


built as a house



Able to withstand **high wind** and **snow loads**



10 Year Warranty

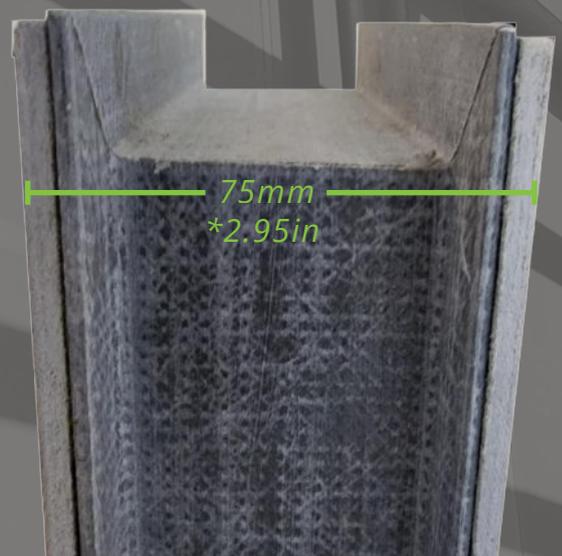



Link Hybrid Tent 4.6m

*15ft


Hybrid Tent

Hybrid Tent Price Includes	Price USD
Custom Stretch PVC Design	\$13,200
x3 Standard Hybrid Tent's 4.6m x 4.6m *15ft x 15ft	\$96,000
<ul style="list-style-type: none"> • WABi Thermal Insulated Panels • External Canvas Walls • Insulated Canvas Ceiling • Sliding Glass Doors (1 Per Tent) • Floor joist and bearers galvanised 200C • Steel structural frame – Hot dipped galvanised steel • CFC Floor Sheeting • All fixing required for install 	
x2 Small Hybrid Module Link	\$5,700
<ul style="list-style-type: none"> • WABi Thermal Insulated Panels • Gyprock Ceiling & Insulation • Colorbond Tin Roof & External Canvas Walls • Floor joist and bearers galvanised 200C • Steel structural frame – Hot dipped galvanised steel • CFC Floor Sheeting • All fixing required for install 	
Composite Deck 1.8m x 15.2m *5.9ft x 49.8ft	\$7,660
Total	\$122,560

Value Adds	Price USD
Eco Anchors *Base Requires 21	\$115 each
Sub floor Insulation *Varies per m2	\$4,340
Internal Canvas Walls *Varies per Lm2	\$10,984
Deck Upgrade 2.7m	\$3,830
Vinyl Floor *Varies per m2	\$2,520
Additional Sliding Glass Doors	\$4,207 each
Add-on Enclosure	N/A
Bath Pod *Includes Steel Slide & Canvas Wrap	\$16,579 each
Bath Kit *Internal Walls Not Included	\$2,900
K1 Kitchen *Appliances and Splashback Not Included	\$1,990
2 Tread Stairs	\$499
Balustrade *Varies per m2	\$7,031

*Please note - All prices are in USD 1AUD=0.66USD and exclude Sales Tax, installation, plumbing, electrical works and civil works. No allowance for concrete footings have been made if rock is present. Internal floor layouts shown for illustrative purposes only- All furniture is by client. Subject to engineering and design specification changes.

As Shown- 3 Sliding Doors
Internal- 67m2
*219.8sqft
Decking- 35m2
*114.8sqft
Does not include internal walls and bathroom

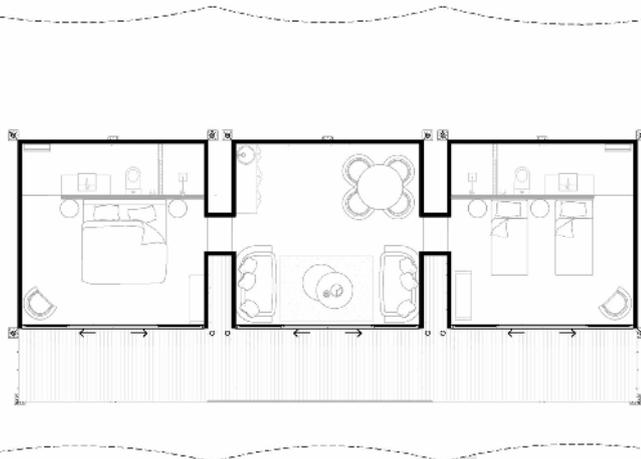



Link Hybrid Tent 6.4m


*20.9ft

Hybrid Tent

Hybrid Tent Price Includes	Price USD
x2 Standard Hybrid Tent's 6.4m x 6.4m *20.9ft x 20.9ft <ul style="list-style-type: none"> PVC Roof WABi Thermal Insulated Panels External Canvas Walls Insulated Canvas Ceiling Sliding Glass Doors (1 Per Tent) Floor joist and bearers galvanised 200C Steel structural frame – Hot dipped galvanised steel CFC Floor Sheeting All fixing required for install 	\$82,276
x1 Hybrid Module Link <ul style="list-style-type: none"> x2 Sliding Glass Doors (Front & Rear) WABi Thermal Insulated Panels (Ends) Gyprock Ceiling & Insulation Colorbond Tin Roof & External Canvas Walls Floor joist and bearers galvanised 200C Steel structural frame – Hot dipped galvanised steel CFC Floor Sheeting All fixing required for install 	\$32,300
Composite Deck 2.7m x 19m & 2.7m x 6.4 *8.8ft x 62.3ft x 8.8ft x 20.9ft	\$19,180
Total	\$133,756

Value Adds	Price USD
Eco Anchors <i>*Base Requires 28</i>	\$115 each
Sub floor Insulation <i>*Varies per m2</i>	\$7,440
Internal Canvas Walls <i>*Varies per Lm2</i>	\$15,280
Vinyl Floor <i>*Varies per m2</i>	\$4,320
Additional Sliding Glass Doors	\$5,298 each
Add-on Enclosure	N/A
Bath Pod <i>*Includes Steel Slide & Canvas Wrap</i>	\$16,579 each
Bath Kit <i>*Internal Walls Not Included</i>	\$2,900
K1 Kitchen <i>*Appliances and Splashback Not Included</i>	\$1,990
2 Tread Stairs	\$499
Balustrade <i>*Varies per m2</i>	\$13,538

**Please note - All prices are in USD 1AUD=0.66USD and exclude Sales Tax, installation, plumbing, electrical works and civil works. No allowance for concrete footings have been made if rock is present. Internal floor layouts shown for illustrative purposes only- All furniture is by client. Subject to engineering and design specification changes.*

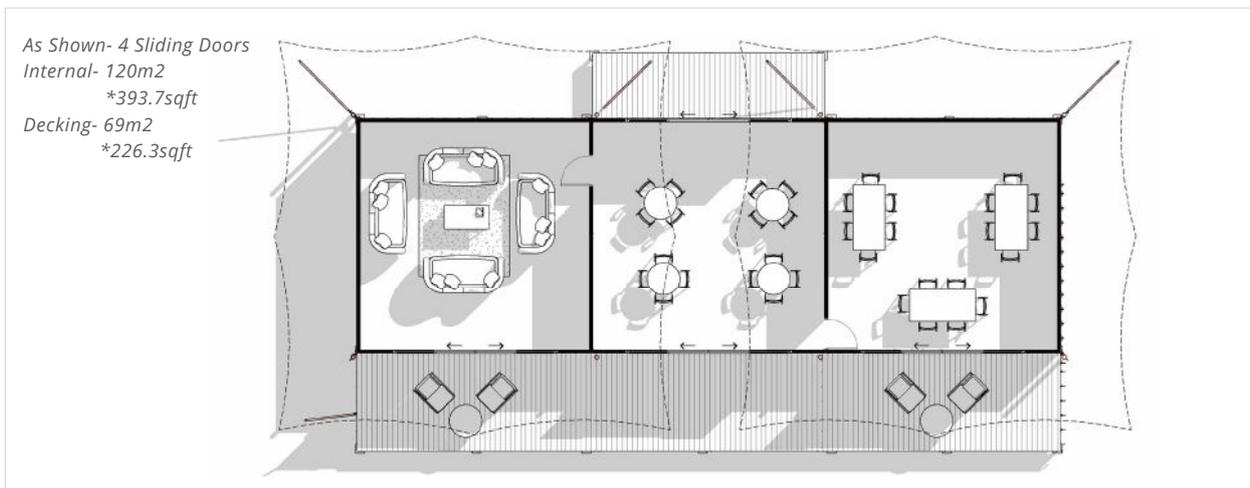



Project Imagery

Stonefish Wines

LOCATION
Margaret River, Australia

PRODUCT
6.3m Link Eco Tent
*20.6ft

TYPE
Facility Building, Winery



Canvas: Red Sand



PVC: Pale Beige



Deck: IPE



Glass: Anodic Silver



Vinyl: Smoked Oak



Mysk Moon Retreat

LOCATION
UAE

PRODUCT
5m Link Eco Tent
*16.4ft


TYPE
Private Retreat



Canvas: Red Sand



PVC: Pale Beige



Deck: IPE



Glass: Andoic Grey



Vinyl: N/A

Budgalong Spicers Creek


LOCATION
Spicers Creek, Australia

PRODUCT
4.6m Link Hybrid Tent
*15ft

TYPE
Private Retreat



Canvas: Grey




PVC: White



Deck: Antique



Glass: Anodic Silver



Vinyl: Custom

Bathpod: Mid Tone



Extra Information



Link Tent Specifications


Required Choices

PVC Roof



Pale Beige

Canvas




Red Sand

Decking




Teak

Link Roof



Tin- Surfmist




Nato Olive




Sand



IPE



Tin- Dune



Pure White



Mid Grey



Antique



Tin- Wallaby

Optional Choices

Vinyl Flooring



Washed Pine

Glazing Frame



Anodic Silver

Straps



Black Nylon Webbing



Smoked Oak



Satin Black



Brown Leather Strap W/ Brass Buckle



Dark Oak



Any Custom RAL Code



Worldwide Shipping

SHIPPING IS COST +10%

Our aim is to achieve the best possible prices for our customers.

As each custom packing and shipping request is unique, so too is each estimate. Freight estimates are not guaranteed until 30 – 45 days prior to delivery and may vary based on confirmed weight, dimensions, date, and other pertinent information.

Eco Structures works with various freight forwarders & customs brokers to source competitive rates for ocean, air & land transport. From the port you can make your own arrangements to site, or we are happy to arrange transport to your exact site location at an additional fee.





Added Services

At Eco Structures, we offer more than tents—we deliver end-to-end support with services including master planning, council approvals, and 3D renders. Our team ensures your project meets compliance standards while enhancing sustainability and guest experience.



TRAINING PACKAGE

For large projects, Eco Structures offers on-site training to support local teams with installation. Typically, two trainers are deployed for five days to guide the initial setup and ensure a smooth start.



MASTER PLANNING

We design flexible site layouts tailored to topography, climate, access, and future growth—liaising early with local architects to streamline approvals.




3D RENDERS

Our high-quality 3D visualisations bring clients concept to life and support marketing strategies, helping to drive engagement and project success.





Next Steps

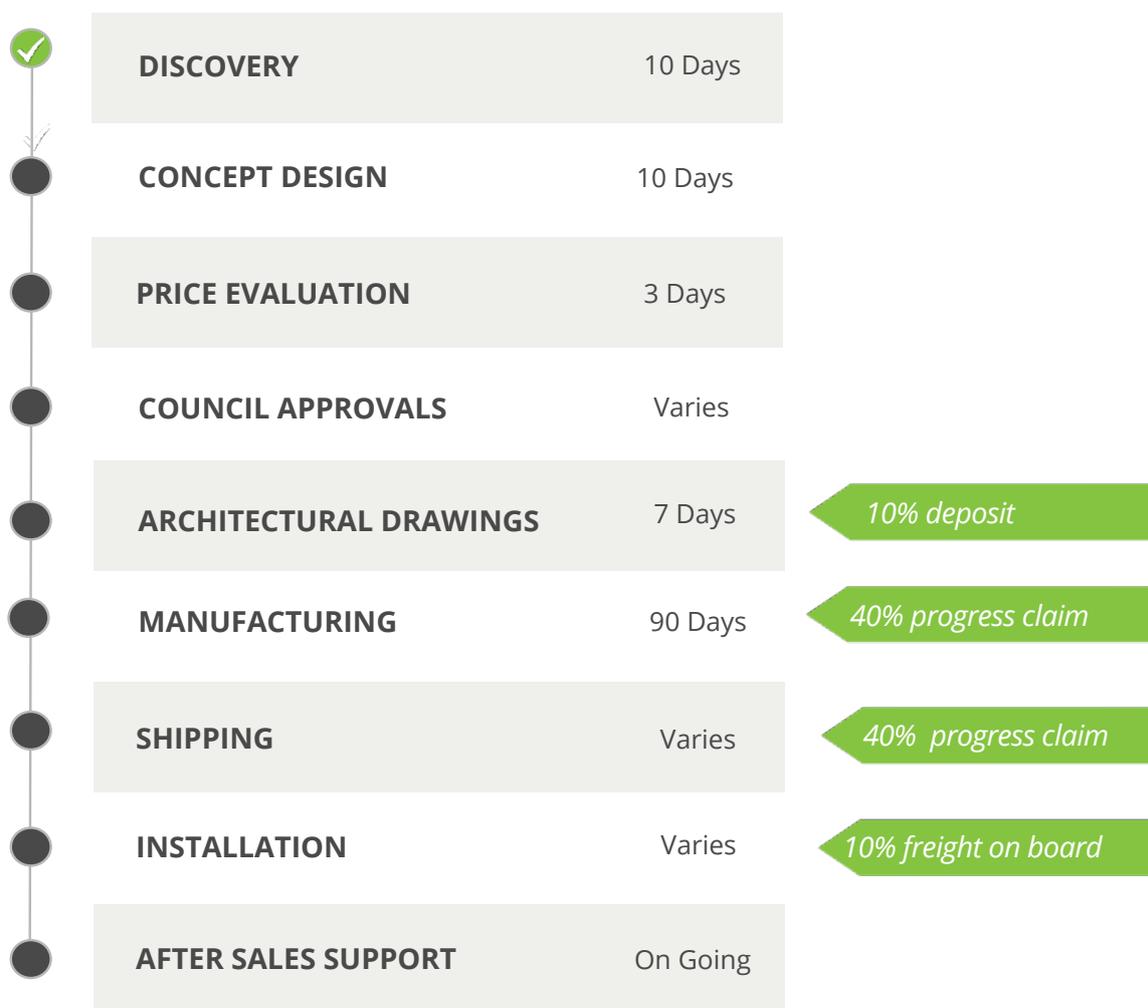

The above timeline is based on a typical Eco Structures project. Actual timelines may vary depending on project complexity, local regulations, and other factors.

As each custom packing and shipping request is unique, so too is each estimate. Freight estimates are not guaranteed until 30 – 45 days prior to delivery and may vary based on confirmed weight, dimensions, date, and other pertinent information.



ECO STRUCTURES

LUXURY EXPERIENTIAL ACCOMMODATION

24 Marine Terrace, Fremantle, Western Australia, 6160
+61 8 9193 8007 | ecostructures.com.au

A company of The WABi Group



W A B I
SIMPLER. SMARTER. STRONGER

W A B I
DESIGN

W A B I
CONSTRUCTIONS

W A B I
WINDOWS